

UV-C Clarifiers

EzClear UV clarifier

Features and Benefits:

- **Highly efficient**
 - * Control blooms of suspended green algae, harmful bacteria, parasites, fungi and protozoan.
 - * Quartz sleeves are made of high grade quality quartz allowing for a transmission rate of over 95%.
- **Ez Installation**
 - * 4 section hose barb 3/4", 1", 1-1/4", 1-1/2".
- **Ez maintenance**
 - * PHILIPS T5 UV lamp.
 - * Transparent cover visible blue UV light.
- **High quality**
 - * With UV-resistant housing & hose barbs.




Parts:



Specification	Model	EUV-16W	EUV-25W	EUV-40W	EUV-75W
Voltage		110-120V / 60Hz			100-240V, 50 / 60Hz
Threaded inlet & outlet connections (in)		1-1/2			
Recommended hose diameter (in)		3/4, 1	1, 1-1/4	1-1/4, 1-1/2	1-1/4, 1-1/2
Recommended flowrate up to (GPH) / (LPH)		1,600 / 6,060	2,000 / 7,600	3,500 / 13,300	5,000 / 18,900
Suitable for pond volume up to (gal) / (L)		3,000 / 11,360	4,000 / 15,200	6,000 / 22,700	10,000 / 37,850
Suitable for kol pond volume up to (gal) / (L)		1,600 / 6,060	2,500 / 9,500	3,500 / 13,300	5,000 / 18,900
Dimensions: LxWxH (in) / (mm)		8x2x16 / 194x51x393	8x2x26 / 194x51x656	8x2x38 / 194x51x953	8x2x38 / 194x51x953
Package dimensions: LxWxH (in) / (mm)		16x8x7 / 395x210x185	27x6x7 / 690x150x185	39x6x7 / 980x150x185	39x6x7 / 980x150x185
Ship weight (lbs) / (kg)		3.5 / 1.6	4.5 / 2.1	4.6 / 2.1	6.5 / 3.0
Spare parts					
UV Lamp		TUV16T5 4P-SE	TUV25T5 4P-SE	TUV36T5 4P-SE	TUV38HOT5 4P-SE
Quartz Sleeve		QSE-L16W	QSE-L25W	QSE-L40/75W	
Ballast		BLE-L16W	BLE-L25W	BLE-L40W	BLE-L75W

• The above specifications are subject to change without prior notice.

Structure:

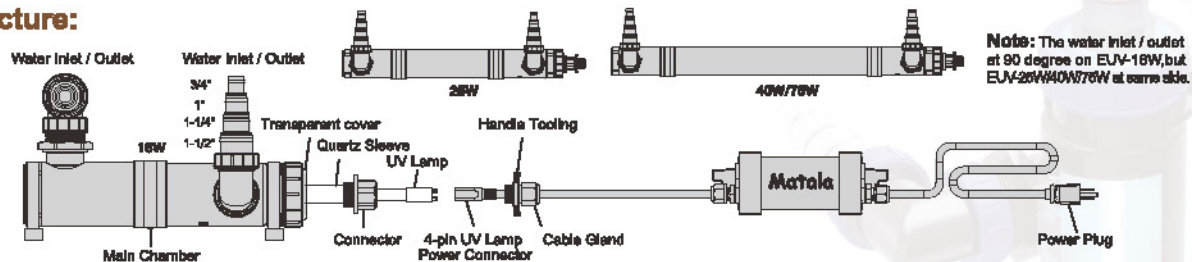

Operates in Horizontal or Vertical position



Available in straight and 90° angular functions



360° multi direction adjustment



EUV-16W fits with Biosteps 10